
Features

Controller

THEJAS32 SoC with **VEGA ET1031** Microprocessor

Memory

2MB Flash

256KB SRAM

Peripherals

- PWM Pins : 8 nos
- Analog input pins : 6 nos
- SPI : 3 nos
- UART : 3 nos
- I2C : 2 nos
- GPIOs : 32 nos (23xGPIO, 2xPB, 3xRGB LED, 2x WIFI, 1xDIGITAL PROXIMITY, 2x 6 AXIS ACCELEROMETER)

Clock Speed

- Clock Speed : 100MHz

Power

- Input Voltage : 7-12V
- DC Current per I/O Pin : 12 mA
- IO Voltage : 3.3 V

NINA-W102-01B Module (WIFI AND BLUETOOTH MODULE)

- Dual-core 32-bit MCU
- Operating supply voltage :3V -3.6V
- Dual/quad SPI
- This radio provides support for Wi-Fi 802.11b/g/n in the 2.4 GHz ISM band and Bluetooth v4.2
- 448 Kbyte ROM and 520 Kbyte SRAM

- 16/32 Mbit FLASH and 1 kbit EFUSE (non-erasable memory)
- 2.4 GHz PIFA antenna

APDS-9960(PROXIMITY, AMBIENT LIGHT, IR AND GESTURE SENSOR)

- Ambient Light and RGB Color Sensing UV and IR blocking filters
- Very high sensitivity Ideally suited for operation behind dark glass
- Proximity sensing with ambient light rejection
- Complex Gesture sensing

BME680(DIGITAL RELATIVE HUMIDITY, GAS, PRESSURE AND TEMPERATURE SENSOR)

- I2C Interface
- Supply voltage range: 1.71 V to 3.6 V
- Operating range : - 40 – +85 °C, 0–100% r.H., 300–1100 hPa
- Individual humidity, pressure and gas sensors can be independently enabled/disabled
- The product is RoHS compliant, halogen-free, MSL1

BMI088(6 AXIS DIGITAL ACCELEROMETER, GYROSCOPE)

- 3 Acceleration channel and 3 Angular rate channel
- SPI Interface
- The BMI088 has an excellent temperature behavior with an outstanding low temperature coefficient of the offset (TCO) and temperature coefficient of the sensitivity (TCS).

CONTENTS

1. The Board	5
2. Ratings	5
2.1 Recommended Operating Conditions	5
2.2 Power Consumption	5
3. Functional Overview	5
3.1 Board Topology	5
3.2 Processor	6
3.3 THEJAS32 pinout	6
3.4 Power Tree	9
4. Board Operation	10
4.1 Getting Started	10
5. Connector Pinouts	10
5.1 Board Outline & Mounting Holes	13
6. Company Information	13
7. Reference Documentation	13

1. The Board

ARIES IoT V2.0 is a feature-rich indigenous hardware platform based on THEAS32 SoC which operates at a frequency of 100MHz. THEAS32 SoC includes VEGA ET1031 Microprocessor, 256KB internal SRAM, Three UARTs, Four SPIs, Three TIMERS, Eight PWMs, Three I2C interfaces, 32 GPIOs etc. This board contains everything needed to support standalone operation. To get started simply connect the board to a computer with a USB-C Cable or power it with a AC/DC adapter or a battery.

2. Ratings

2.1 Recommended Operating Conditions

Symbol	Description	Min	Max
	Conservative thermal limits for the whole board:	-0 °C (100°F)	85 °C (185°F)


2.2 Power Consumption

Symbol	Description	Min	Typ	Max	Unit
VINMax	Maximum input voltage from VIN pad	7	-	12	V
VUSBMax	Maximum input voltage from USB connector	-	5.5	V	
PMax	DC Current per I/O Pin	-	-	12	mA

3. Functional Overview

3.1 Board Topology

Top view

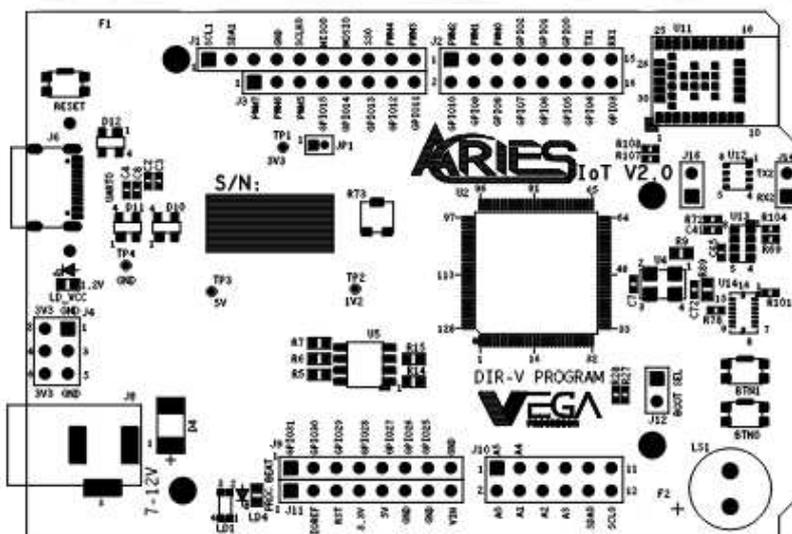

Ref.	Description	Ref.	Description
J8	Power jack	U2	THEJAS32 SoC
J6	USB C Connector	U1	3.3V Regulator
RESET	Reset Button	U4	100 MHz Oscillator
LD1	RGB LED	U5	SPI Boot Flash Memory
BTN0	Push Button 0 for GPIO	U6	Op-amp
BTN1	Push Button 1 for GPIO	U7	1.2V Regulator
LS1	Buzzer	U11	WIFI and Bluetooth Module

3.2 Processor

The main controller is THEAJ32 SoC which operates at a frequency of 100MHz. It includes VEGA ET1031 Microprocessor, 256KB internal SRAM, Three UARTs, Four SPIs, Three TIMERS, Eight PWMs, Three I2C interface, 32 GPIOs. Most of its pins are connected to the external headers, however some are reserved for internal communication.

3.3 THEJAS32 pinout


Pin #	Pin Name	Pin Description
1	GPIO1(3)	General purpose IO.
2	GPIO1(2)	General purpose IO.
3	PVSSIOC23	Ground reference for IO pins.
4	PVDDIO23	Positive supply for IO pins. Connect to 3.3V supply.
5	GPIO1(1)	General purpose IO.
6	GPIO1(0)	General purpose IO.
7	SPI3MOSI	SPI 3 Master Out Slave In.
8	PVDDC18	Positive supply for logic. Connect to 1.2V supply.
9	PVSSC18	Ground reference for logic.
10	SPI3MISO	SPI 3 Master In Slave Out.
11	SPI3CLK	SPI 3 Clock.
12	SPI3CSN	SPI 3 Chip Select.
13	PVSSIOC21	Ground reference for IO pins.
14	PVDDIO21	Positive supply for IO pins. Connect to 3.3V supply.
15	BOOT	Boot select.
16	PROCBT	Heart beat signal.
17	TEDTUPD	Connect to GND.
18	PVDDC17	Positive supply for logic. Connect to 1.2V supply.
19	PVSSC17	Ground reference for logic.
20	TSTCLK	Connect to GND through a 1K resistor.
21	TJTAGTDO	JTAG TDO. Left unconnected.
22	TJTAGTMS	JTAG TMS. Connect to GND through a 1K resistor.
23	TJTAGTDI	JTAG TDI. Connect to GND through a 1K resistor.
24	PVSSIOC19	Ground reference for IO pins.
25	PVDDIO19	Positive supply for IO pins. Connect to 3.3V supply.
26	PVDDC16	Positive supply for logic. Connect to 1.2V supply.
27	PVSSC16	Ground reference for logic.
28	TJTAGTCK	JTAG TCK. Connect to GND through a 1K resistor

29	TJTAGTRST	JTAG TRST. Connect to GND through a 1K resistor
30	TSTMODE	Test mode select. Connect to GND through a 1K resistor.
31	IIC2SDA	I2C 2 Serial Data.
32	IIC2SCL	I2C 2 Serial Clock.
33	IIC0SCL	I2C 0 Serial Clock.
34	IIC0SDA	I2C 0 Serial Data.
35	PVSSC14	Ground reference for logic.
36	PVDDC14	Positive supply for logic. Connect to 1.2V supply.
37	PVDDIO17	Positive supply for IO pins. Connect to 3.3V supply.
38	PVSSIOC17	Ground reference for IO pins.
39	SPI1CSN	SPI 1 Chip Select.
40	SPI1CLK	SPI 1 Clock.
41	SPI1MISO	SPI 1 Master In Slave Out.
42	SPI1MOSI	SPI 1 Master Out Slave In.
43	RSTIN	Reset.
44	CLKSYS	System Clock.
45	URT1SOUT	UART 1 Serial Out / Transmit.
46	PVDDIO15	Positive supply for IO pins. Connect to 3.3V supply.
47	PVSSIOC15	Ground reference for IO pins.
48	PVSSC12	Ground reference for logic.
49	PVDDC12	Positive supply for logic. Connect to 1.2V supply.
50	URT1SIN	UART 1 Serial In / Receive.
51	GPIO0(15)	General purpose IO.
52	GPIO0(14)	General purpose IO.
53	GPIO0(13)	General purpose IO.
54	GPIO0(12)	General purpose IO.
55	GPIO0(11)	General purpose IO.
56	PVSSC11	Ground reference for logic.
57	PVDDC11	Positive supply for logic. Connect to 1.2V supply.
58	GPIO0(10)	General purpose IO.
59	PVDDIO13	Positive supply for IO pins. Connect to 3.3V supply.
60	PVSSIOC13	Ground reference for IO pins.
61	GPIO0(9)	General purpose IO.
62	GPIO0(8)	General purpose IO.
63	GPIO0(7)	General purpose IO.
64	GPIO0(6)	General purpose IO.
65	GPIO0(5)	General purpose IO.
66	GPIO0(4)	General purpose IO.
67	PVSSC9	Ground reference for logic.
68	PVDDC9	Positive supply for logic. Connect to 1.2V supply.
69	PVDDIO11	Positive supply for IO pins. Connect to 3.3V supply.
70	PVSSIOC11	Ground reference for IO pins.
71	GPIO0(3)	General purpose IO.
72	GPIO0(2)	General purpose IO.
73	GPIO0(1)	General purpose IO.

74	GPIO0(0)	General purpose IO.
75	PWM(7)	Pulse Width Modulation.
76	PWM(6)	Pulse Width Modulation.
77	PWM(5)	Pulse Width Modulation.
78	PVSSC7	Ground reference for logic.
79	PVDDC7	Positive supply for logic. Connect to 1.2V supply.
80	PWM(4)	Pulse Width Modulation.
81	PWM(3)	Pulse Width Modulation.
82	PWM(2)	Pulse Width Modulation.
83	PVDDIO8	IO Power Supply VDD pin.
84	PVSSIOC8	Ground reference for IO pins.
85	PWM(1)	Pulse Width Modulation.
86	PWM(0)	Pulse Width Modulation.
87	SPI0MOSI	SPI 0 Master Out Slave In.
88	PVSSC6	Ground reference for logic.
89	PVDDC6	Positive supply for logic. Connect to 1.2V supply.
90	SPI0MISO	SPI 0 Master In Slave Out.
91	SPI0CLK	SPI 0 Clock.
92	SPI0CSN	SPI 0 Chip Select.
93	PVDDIO6	Positive supply for IO pins. Connect to 3.3V supply.
94	PVSSIOC6	Ground reference for IO pins.
95	IIC1SDA	I2C 1 Serial Data.
96	IIC1SCL	I2C 1 Serial Clock.
97	SPI2MOSI	SPI 2 Master Out Slave In.
98	SPI2MISO	SPI 2 Master In Slave Out.
99	PVDDC4	Positive supply for logic. Connect to 1.2V supply.
100	PVSSC4	Ground reference for logic.
101	SPI2CLK	SPI 2 Clock.
102	SPI2CSN	SPI 2 Chip Select.
103	PVSSIOC4	Ground reference for IO pins.
104	PVDDIO4	Positive supply for IO pins. Connect to 3.3V supply.
105	URT2SIN	UART 2 Serial In / Receive.
106	URT2SOUT	UART 2 Serial Out / Transmit.
107	URT0SIN	UART 0 Serial In / Receive.
108	URT0SOUT	UART 0 Serial Out / Transmit.
109	GPIO1(15)	General purpose IO.
110	GPIO1(14)	General purpose IO.
111	GPIO1(13)	General purpose IO.
112	PVDDC2	Positive supply for logic. Connect to 1.2V supply.
113	PVSSC2	Ground reference for logic.
114	PVSSIOC2	Ground reference for IO pins.
115	PVDDIO2	Positive supply for IO pins. Connect to 3.3V supply.
116	GPIO1(12)	General purpose IO.
117	GPIO1(11)	General purpose IO.
118	GPIO1(10)	General purpose IO.

119	GPIO1(9)	General purpose IO.
120	GPIO1(8)	General purpose IO.
121	GPIO1(7)	General purpose IO.
122	GPIO1(6)	General purpose IO.
123	PVSSIOC0	Ground reference for IO pins.
124	PVDDIO0	Positive supply for IO pins. Connect to 3.3V supply.
125	PVDDC0	Positive supply for logic. Connect to 1.2V supply.
126	PVSSC0	Ground reference for logic.
127	GPIO1(5)	General purpose IO.
128	GPIO1(4)	General purpose IO.

3.4 Power Tree

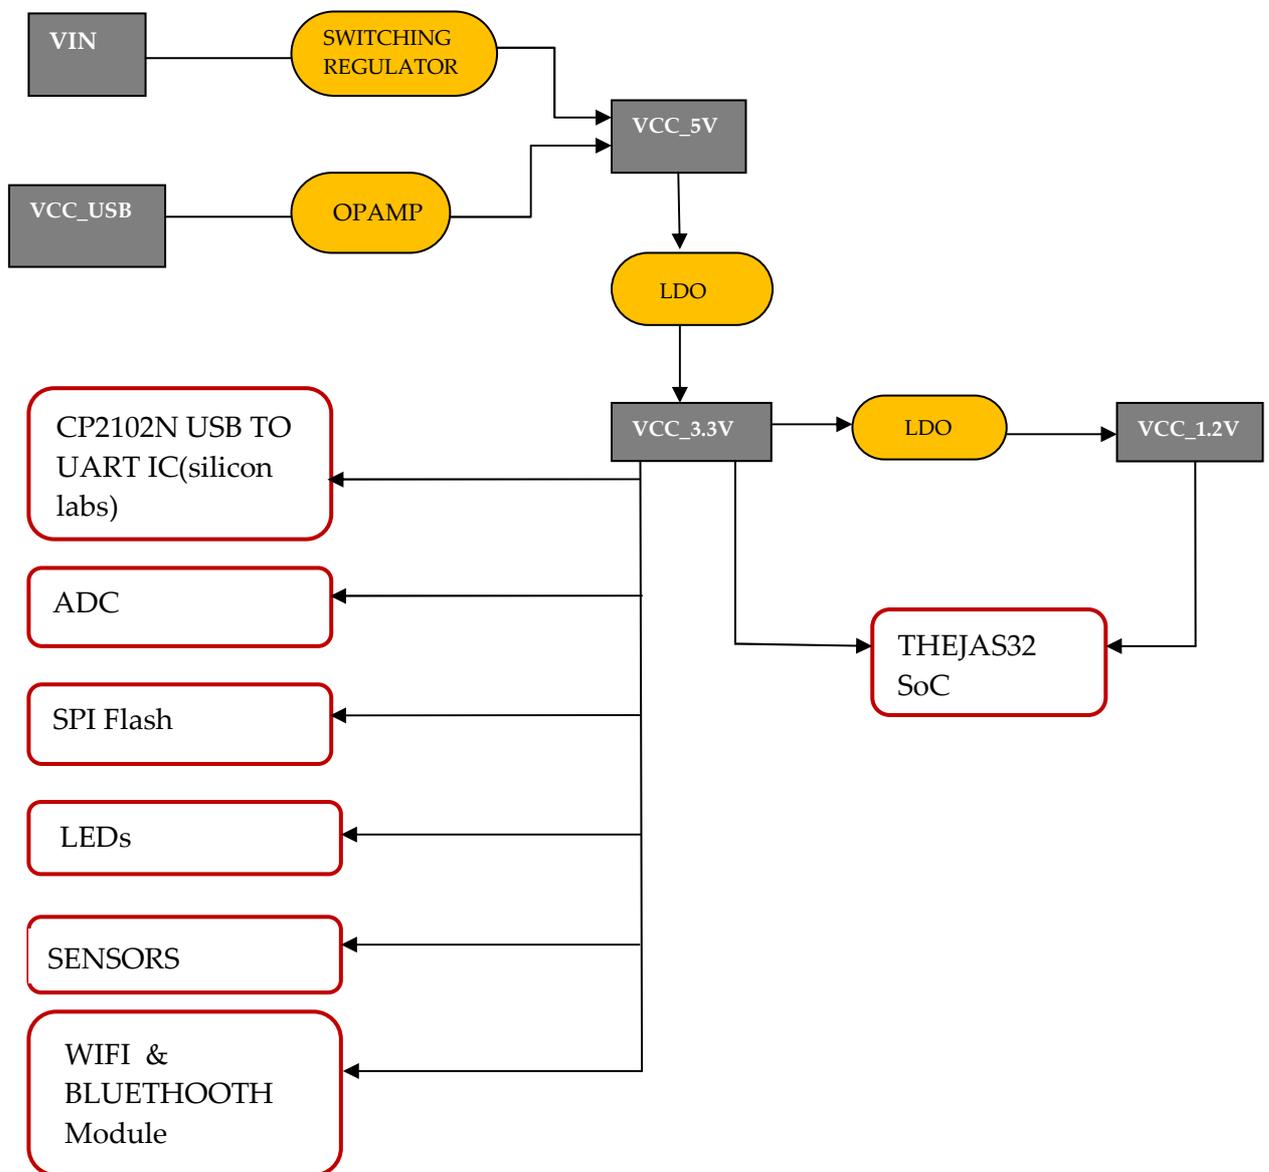


4. Board Operation

4.1 Getting Started

- To use Vega Arduino IDE for programming follow the steps given in the link below
 - For Linux; <https://bit.ly/vega-linux>
 - For Windows; <https://bit.ly/vega-windows>
- To use Eclipse IDE for programming follow the steps given in the link below
 - <https://cdac-vega.gitlab.io/sdkuserguide.html>


5. Connector Pinouts

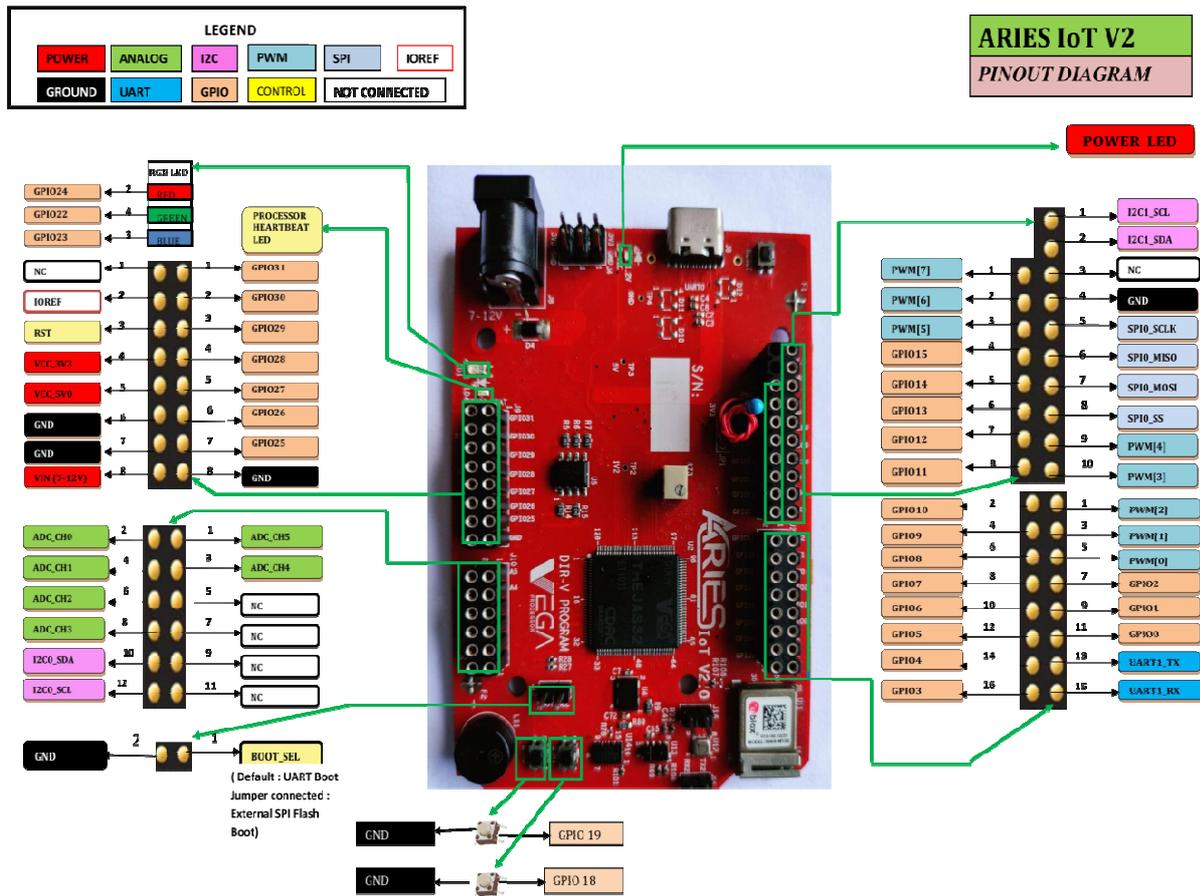

SL NO.	SPECIFICATIONS	THEJAS32	ARIES BOARD	REMARKS
1	SPI (4)	SPI0_SS	J1_8	Connected to HEADER J1
2		SPI0_SCLK	J1_5	
3		SPI0_MISO	J1_6	
4		SPI0_MOSI	J1_7	
5		SPI1_SS	U11_28	Connected to WIFI (U11) Module
6		SPI1_SCLK	U11_29	
7		SPI1_MISO	U11_1	
8		SPI1_MOSI	U11_21	
9		SPI2_SS	U14_14	Connected to BMIO88 (U14) IC
10		SPI2_SCLK	U14_8	
11		SPI2_MISO	U14_10,U14_15	
12		SPI2_MOSI	U14_9	
13		SPI3_SS	U5_1	Connected to SPI BOOT FLASH IC
14		SPI3_SCLK	U5_6	
15		SPI3_MISO	U5_2	
16		SPI3_MOSI	U5_5	
17	I2C (3)	SCL	J10_12	Connected to HEADER J10
18		SDA	J10_10	
19		SCL_1	J1_1	Connected to HEADER J1
20		SDA_1	J1_2	
21		SCL_2	U13_7, U9_14, U12_4	Connected to APDS-9960 IC (U11), BME680 IC(U12) AND I2C ADC IC(U9)
22		SDA_2	U9_15, U13_1, U12_3	
23	UART (3)	UART0_RXD	U10_18	Connected to UART TO USB INTERFACE IC
24		UART0_TXD	U10_17	
25		UART1_RX	J2_15	Connected to HEADER J2
26		UART1_TX	J2_13	
27		UART2_RX	U11_22	Connected to WIFI(U11) Module
28		UART2_TX	U11_23	
29	PWM (8)	PWM[0]	J2_5	Connected to HEADER J2
30		PWM[1]	J2_3	
31		PWM[2]	J2_1	
32		PWM[3]	J1_10	Connected to HEADER J1
33		PWM[4]	J1_9	
34		PWM[5]	J3_3	Connected to HEADER J3
35		PWM[6]	J3_2	
36		PWM[7]	J3_1	
37		GPIO0	J2_11	Connected to HEADER J2
38		GPIO1	J2_9	
39		GPIO2	J2_7	
40		GPIO3	J2_16	
41		GPIO4	J2_14	

42	GPIO (32)	GPIO5	J2_12		
43		GPIO6	J2_10		
44		GPIO7	J2_8		
45		GPIO8	J2_6		
46		GPIO9	J2_4		
47		GPIO10	J2_2		
48		GPIO11	J3_8		Connected to HEADER J3
49		GPIO12	J3_7		
50		GPIO13	J3_6		
51		GPIO14	J3_5		
52		GPIO15	J3_4		
53		GPIO16	U11_7	Connected to WIFI (U11) Module	
54		GPIO17	U11_27		
55		GPIO18	BTN1_1	Connected to PUSH BUTTON	
56		GPIO19	BTN0_1		
57		GPIO20	U11_19	Connected to WIFI (U11)MODULE	
58		GPIO21	U14_5	Connected to BMI088(U14) IC	
59		GPIO22	LD1_3	Connected to GREEN of RGB LED	
60		GPIO23	LD1_4	Connected to BLUE of RGB LED	
61		GPIO24	LD1_2	Connected to RED of RGB LED	
62		GPIO25	J9_7	Connected to HEADER J9	
63		GPIO26	J9_6		
64		GPIO27	J9_5		
65		GPIO28	J9_4		
66		GPIO29	J9_3		
67		GPIO30	J9_2		
68		GPIO31	J9_1		
69		CLOCK	CLK_100M	U4_3	Connected to OSCILLATOR
70		RESET	PUSH_RESETN		Connected to RESET
71		HEART BEAT LED	PROC_HEART_BEAT	LD4_1	Connected to LED
72		BOOT SELECT	BOOT_SEL	J12_1	Connected to HEADER J12
73		ADC_CH0	_	J10_2	ANALOG INPUTS Connected to HEADER J10 & I2C ADC IC
74	ADC_CH1	-	J10_4		
75	ADC_CH2	-	J10_6		
76	ADC_CH3	-	J10_8		
77	ADC_CH4	-	J10_5		
78	ADC_CH5	_	J10_3		
79	ADC_CH6	_	U9_7		
76	ADC_CH7	-	U9_8		

5.1 Board Outline & Mounting Holes

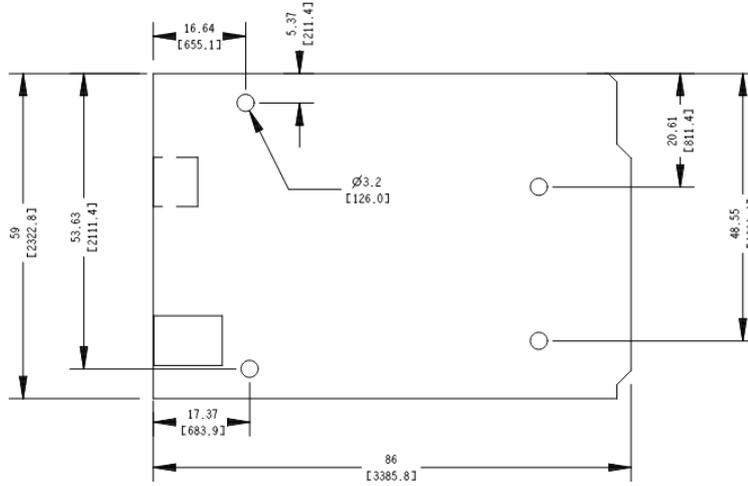

(Dimensions in mm[mil])

6. Company Information

Company name	C-DAC
Company Address	Hardware Design Group Centre for Development of Advanced Computing (C-DAC) Thiruvananthapuram, Kerala – 695033 Fax: 0471-2723456 Email: vega@cdac.in www.vegaprocessors.in www.cdac.in

7. Reference Documentation

Reference	Link
ARIES IoT V2.0 details	https://vegaprocessors.in/devboards/ariesiotv2.html